POSB12200A-E1/U1/U2/A3 series

12V / 2A Wall mounted type AC/DC adaptor with plug EU/UK/US/AU



■ Features:

- Universal AC input / Full range
- ErP step II / CEC level VI compliance
- No load power consumption P < 0.075W

• Protections: Overload / Short circuit / Over Voltage













MODEL	POSB12200A-E1/U1/U2/A3
OUTPUT	
Rated Voltage	12V
Rated Current	2A
Current Range	0 ÷ 2A
Rated Power	24W
Line Regulation	± 1%
Load Regulation	± 5%
Tolerance	± 5%
Ripple & Noise (max.)	120mV _{P-P}
Setup, RiseTime	5000ms, 30ms / 230VAC at full load
Hold up Time (typ.)	4ms / 230VAC at full load

INPUT	
Voltage Range	90 ÷ 264VAC
Frequency Range	47 ÷ 63Hz
Efiiciency (typ.)	86,2%
AC Current (typ.)	0.3A / 230VAC
No load Power Consumption (max.)	0.075W

PROTECTIONS	
Overload	Range: 105-200%
	Auto-recovery.
Short Circuit	Type: hiccup mode, auto-recovery.
Over Voltage	Type: auto-recovery.

POSB12200A-E1/U1/U2/A3 series




12V / 2A Wall mounted type AC/DC adaptor with plug EU/UK/US/AU


WORKING ENVIRONMENT	
Working Temperature	-10°C ÷ 45°C
Working Humidity	10 ÷ 90% RH non-condensing
Storage Temperature and Humidity	-20°C ÷ 60°C, 5 ÷ 90% RH non-condensing

SAFETY and EMC REGULATIONS	
Safety Standards	Compliance to EN 60950-1
Withstand Voltage	IN/OUT: 3.6kVAC
Isolation Resistance	IN/OUT: 50MΩ/500VDC/25°C/70%
EMC Emission	Compliance to EN55032, FCC PART 15B, AS/NZS CISPR22
EMC Immunity	Compliance to EN61000-4-2, -3, -4, -5
Harmonic Current	Compliance to EN61000-3-3; EN61000-3-2

OTHERS		
DC wire and plug	Wire: 20AWG*2C, length = 1200mm	Plug: 2.1/5.5, positive inside
Net Weight / Dimensions	150g / 71.5 x 43.5 x 31.5mm (L x W x H)	

MECHANICAL SPECIFICATION

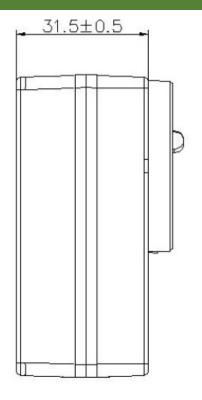

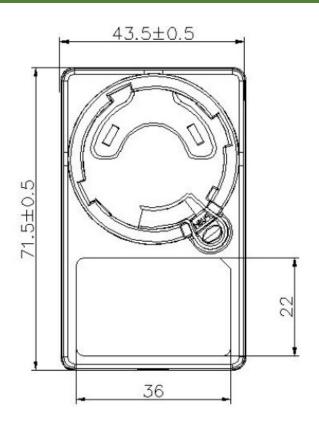


2

POSB12200A-E1/U1/U2/A3 series



12V / 2A Wall mounted type AC/DC adaptor with plug EU/UK/US/AU

MECHANICAL SPECIFICATION:

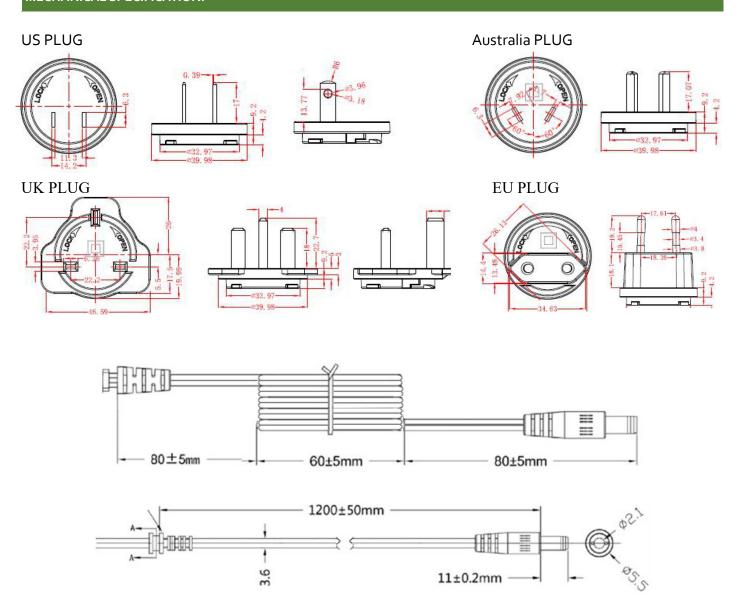

- 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25 °C of ambient temperature.
- $2. \textit{ Ripple \& noise are measured at 20MHz of bandwidth by using a 12" twisted \textit{pair-wire terminated with a 0.1} \mu \textit{F i 47} \mu \textit{F parallel capacitor.}}$
- 3. Tolerance includes set up tolerance, line regulation and load regulation.
- 4. Setup and rise time is measured from 0 to 90% rated output voltage.
- 5. Power supply is considered as component not indented to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-quality to comply with EMC Directives.